


MK-725

CEILING SPEAKER

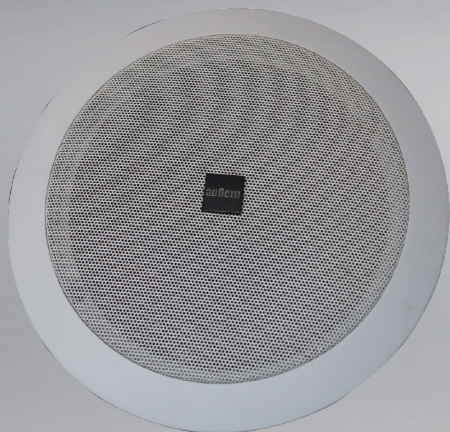

1"+5"

SUBWOOFER



BUILT-IN TRAFO

HI-VOLT PROTECT



RMS ADJUSTABLE

5W/10W/20W



1.25kg

GROSS WEIGHT

FEATURES

- ✓ MK-725 is 2-Way Ceiling Speaker, uses 5"LF Driver with adjustable RMS Power from 5W/10W/20W.
- ✓ MK-725 was design for "Paging" and "Music Backsound" so can provide Voice more Natural & Softer.
- ✓ Voltage input and electric resistance are optional. Voltage Input (70V & 100V) and electric resistance (8Ω) are available for different occasions. Installation is easy & flexible with only Hole size of the ceiling should be considered.

APPLICATION

Small to Medium Room, Class/Meeting Room, Building/Office Corridor, Lobby/Lounge, Public Area, etc.

RECOMMENDED

Height Placement : ±3,5m – 5m

DETAIL PRODUCT



RMS Power	5W/10W/20W
Line Voltage	70V - 100V / 8Ω
Drive Unit	1" Tweeter 5" Woofer
Frequency Response	100Hz -20 KHz
Sensitivity	88±3dB
Dimension (Φ)	203mm
Gross Weight	1,25kg
Rec.Amplifier	PA120/240/360/500/800UL