



**1"+6"**  
SUBWOOFER



**BUILT-IN TRAF0**  
HI-VOLT PROTECT



**RMS ADJUSTABLE**  
7,5W/15W/30W



**1.25kg**  
GROSS WEIGHT

## FEATURES

- ✓ MK-726 is 2-Way Ceiling Speaker, uses 6" LF Driver with adjustable RMS Power from 7,5W/15W/30W.
- ✓ MK-726 was design for "Paging" and "Music Backsound" so can provide Voice more Natural & Softer.
- ✓ Voltage input and electric resistance are optional. Voltage Input (70V & 100V) and electric resistance (8Ω) are available for different occasions. Installation is easy & flexible with only Hole size of the ceiling should be considered.


## APPLICATION

Small to Medium Room, Class/Meeting Room, Building/Office Corridor, Lobby/Lounge, Public Area, etc.

## RECOMMENDED

Height Placement : ±4m – 4,5m

## DETAIL PRODUCT

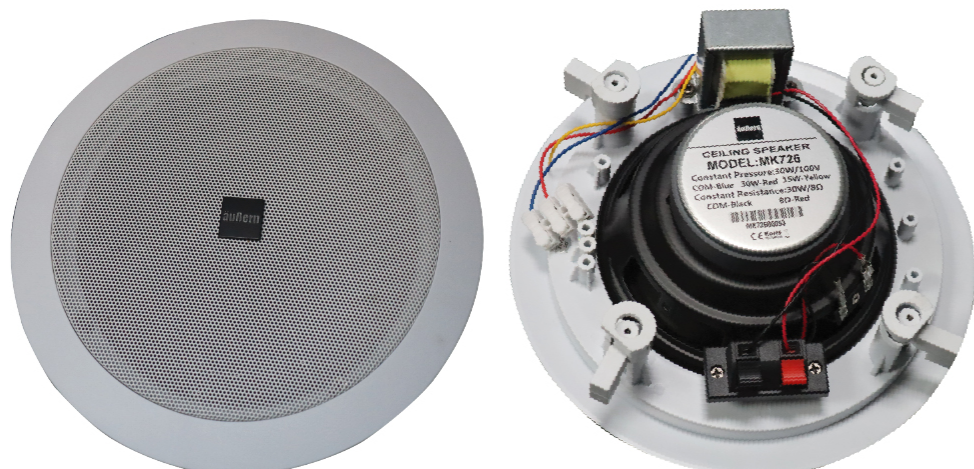

RMS Power	7,5W/15W/30W
Line Voltage	70V - 100V / 8Ω
Drive Unit	1" Tweeter   6" Woofer
Frequency Response	90Hz - 20 KHz
Sensitivity	90±3dB
Dimension (Φ)	230mm
Gross Weight	1,25kg
Rec.Amplifier	PA120/240/360/500/800UL